


CONVENTIONAL LATHE DY-1600G~2000G BED WIDTH 888MM

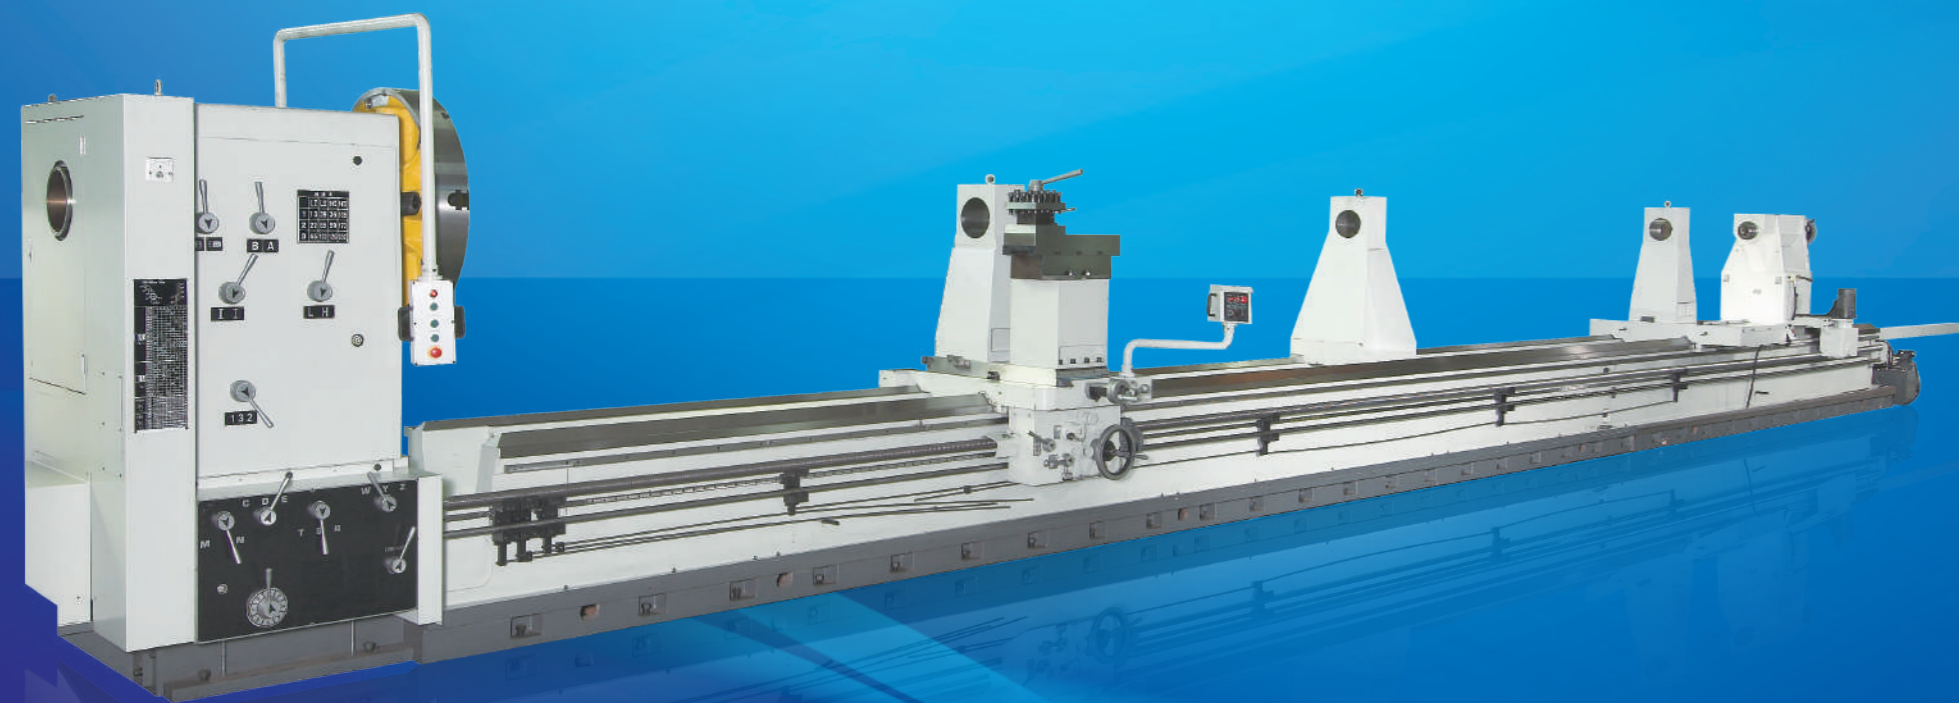

DY 2000GX15000

MODEL		DY-1600G	DY-1700G	DY-1800G	DY-1900G	DY-2000G
Swing	Distance between centers	2000/3000/4000/5000/6000/7000/8000/9000/10000/11000/12000/13000/14000/15000/16000/17000/18000/19000/20000/21000/ 22000/23000/24000/25000mm (Within 40000 is available)				
	Height of center (over bed)	800mm	850mm	900mm	950mm	1000mm
	Swing over bed	1600mm	1700mm	1800mm	1900mm	2000mm
	Swing over cross slide	1230mm	1330mm	1430mm	1530mm	1630mm
	Over gap swing	1900x750	2000x750	2100x750	2200x750	2300x750
Bed	Bed width	888mm				
Headstock	Spindle nose	A2-11 or A2-15 or A2-20 or A2-28 ISO				
	Spindle bore	165 or 230 or 310mm or 410mm				
	Spindle speed (rpm)	5~400rpm				
	Number of spindle speed	12 steps				
Feeds- Thread	Leadscrew	Ø58 mm. 2T.P.I or 12 pitch.				
	Longitudinal feed range	0.0100~1.4145 mm/rev				
	Cross feed range	0.0102~0.5735mm/rev				
	Inch threads	35 kinds, 1~59 T.P.I.				
	Metric threads	34 kinds, 0.8~18mm				
Tool slide	Cross slide travel	1000 mm				
	Compound rest travel	350 mm				
Tailstock	Quill travel	400mm				
	Quill diameter	220mm / 295mm (opt.)				
	Taper of center	MT#6 / MT#7 (opt.)				
Motor	Main motor	50HPx4P				
	Rapid feed motor	1/2HP				
	Coolant pump	1/2HP				
Length (mm)	4500/5500/6500/7500/8500/9500/10500/11500/12500/13500/14500/ 15500/16500/17500/18500/19500/20500/21500/22500/23500/24500/25500/26500/27500mm					
Width (mm)	2200mm					
Height (mm)	2400	2500	2600	2700	2800	
N.W. (kg) (approx.)	11000/13000/15000/17000/19000/21000/23000/25000/27000/29000/31000 33000/35000/37000/39000/41000/43000/45000/47000/49000/51000/53000/55000/57000kg					
Workpiece Weight capacity	Chuck only	Chuck + Tailstock	Chuck + 1 Steady rest + Tailstock	Chuck + 2 Steady rest + Tailstock		
Spindle bore 165mm	2500kg	9000kg	12000kg	16000kg		
Spindle bore 230mm~410mm	3400kg	10400kg	15400kg	20400kg		

* ABOVE SPECIFICATIONS ARE FOR YOUR REFERENCE AND SUBJECT TO CHANGE WITHOUT NOTICE. FOR SPECIAL REQUIREMENTS PLEASE CONTACT US.

www.annnyang.com

DY-1100G~1500G

DY-1600G~2000G

DY-2000VS~2300VS

DY-410~510VS

DY-560~760VS